


The **NDF9076** is a low-loss, compact, and economical surface-acoustic-wave (**SAW**) RF filter in a surface-mount ceramic **DCC6C** case for mobile communications ISM900 systems. It provides low insertion loss and high attenuation.

1. Package Dimensions (DCC6C)

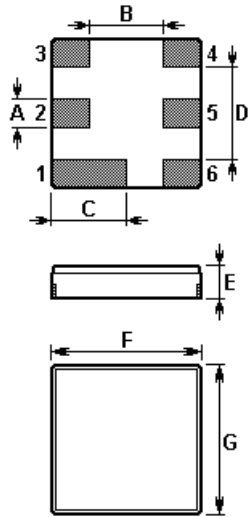

Pin	Configuration
2	Input / Output
5	Output / Input
1, 3, 4, 6	Case Ground


Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	0.6	E	1.1
B	1.5	F	3.0
C	1.5	G	3.0
D	1.8		

2. Marking






Laser Marking

3. Test Circuit

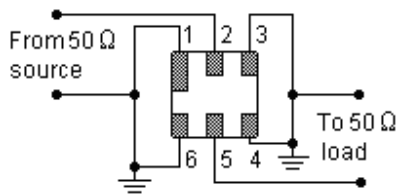

4. Performance

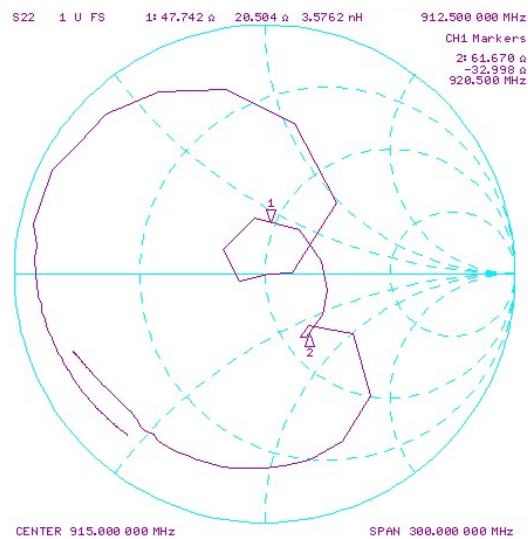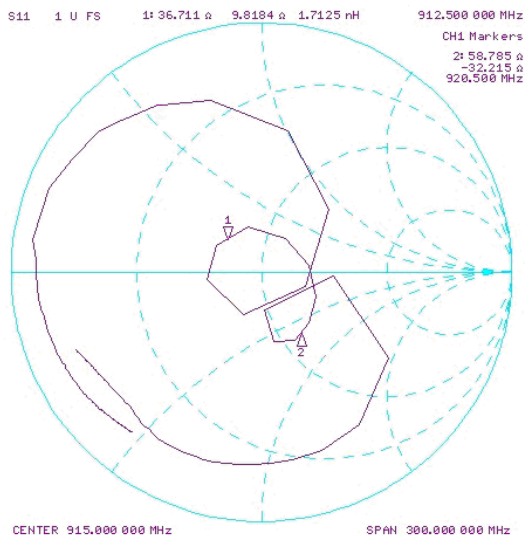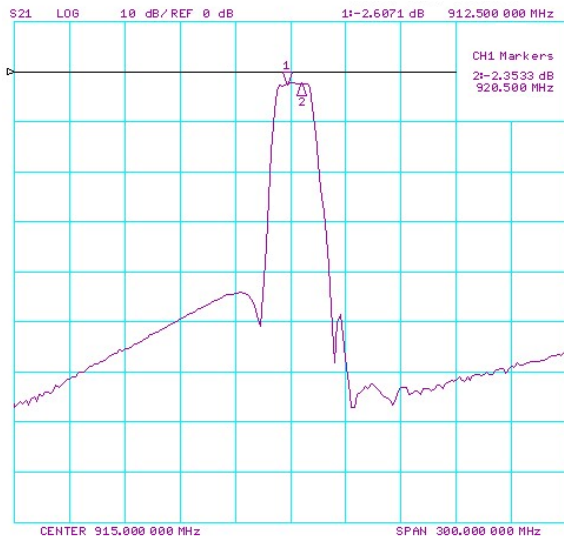

5. Specification

5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	P	15	dBm
DC Voltage	V_{DC}	12	V
Operable Temperature Range	T_A	-30 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +85	°C

5-2. Electronic Characteristics

Characteristic		Min.	Typ.	Max.	Unit
Nominal Center Frequency	f_c		915.000		MHz
3dB Bandwidth	BW	--	19.3	--	MHz
Insertion Loss	IL	--	3.2	3.5	dB
	911.5 918.5 MHz				
Passband Ripple	$\Delta\alpha$	--	0.3	1.0	dB
	911.5 918.5 MHz				
Absolute Stop-band Attenuation	α				
	DC 600 MHz	50	66	--	dB
	600 840 MHz	40	45	--	dB
	869 894 MHz	35	40	--	dB
	970 1500 MHz	40	46	--	dB
	1500 3000 MHz	25	28	--	dB
Passband VSWR (Return Loss)	911.5 918.5 MHz	-- (9.5)	1.75 (11.3)	2.0	(dB)
Input / Output Impedance			50		Ω

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2003. All Rights Reserved.

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com