


The **NDF9118** is a low-loss, compact, and economical surface-acoustic-wave (SAW) RF filter in a surface-mount ceramic **DCC6C** case for cordless telephone. It provides low insertion loss and high attenuation.

**1. Package Dimension (DCC6C)**

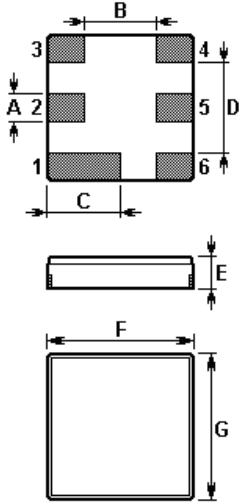

Pin	Configuration
2	Input / Output
5	Output / Input
1, 3, 4, 6	Case Ground


Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	0.6	E	1.1
B	1.5	F	3.0
C	1.5	G	3.0
D	1.8		

**2. Marking**


**NDF9118**

Laser Marking

**3. Matching Circuit**

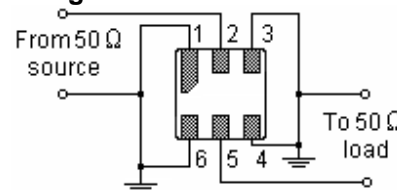

**4. Typical Frequency Response**

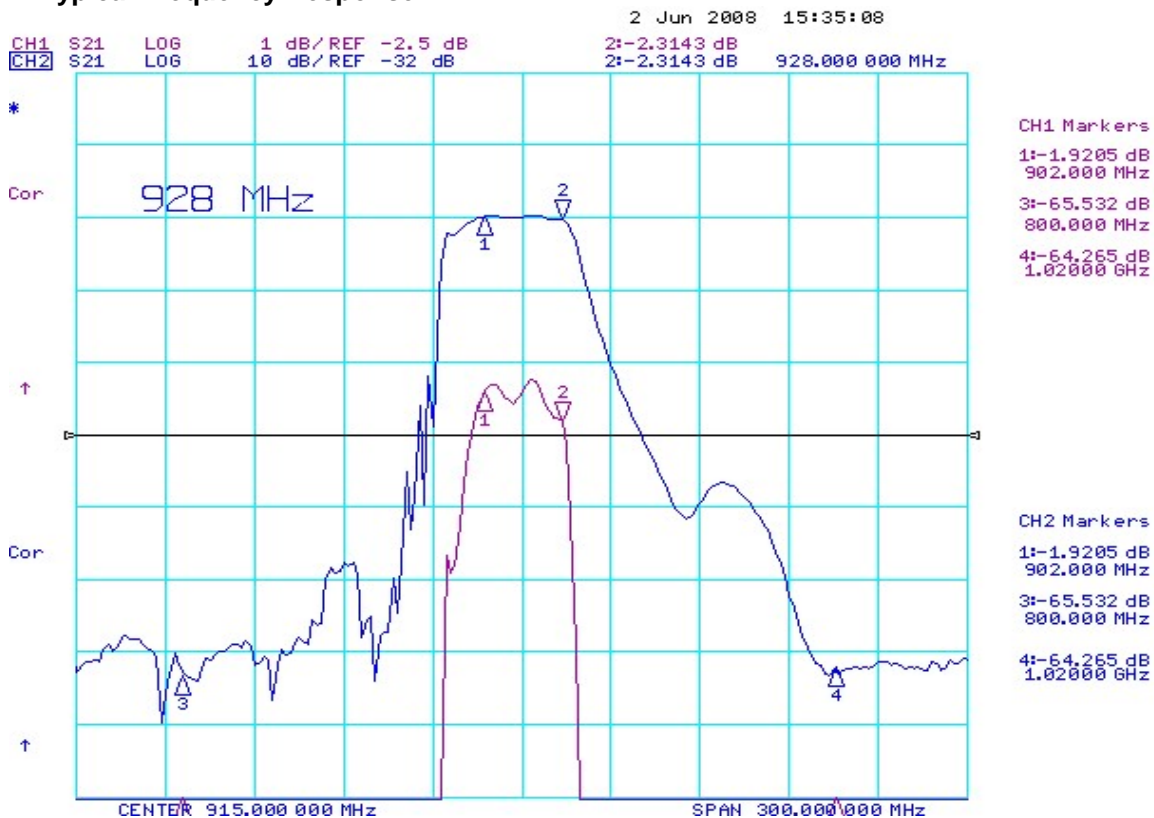

**5. Performance**
**5-1. Maximum Ratings**

Rating		Value	Unit
Input Power Level	$P$	20	dBm
DC Voltage	$V_{DC}$	12	V
Operable Temperature Range	$T_A$	-40 to +85	°C
Storage Temperature Range	$T_{stg}$	-40 to +85	°C

**5-2. Electronic Characteristics**

Characteristic		Minimum	Typical	Maximum	Unit
Nominal Center Frequency	$f_C$	--	915.000	--	MHz
Usable Pass Bandwidth	$BW$	--	26	--	MHz
Insertion Loss	$IL$	--	2.3	3.5	dB
	902.00 .... 928.00 MHz				
Inband Ripple	$\Delta\alpha$	--	0.8	1.2	dB
	902.00 .... 928.00 MHz				
Absolute Attenuation	$\alpha$				dB
	DC .... 800.00 MHz	45	58	--	dB
	800.00 .... 865.00 MHz	40	48	--	dB
	975.00 .... 1020.0 MHz	30	40	--	dB
	1020.0 .... 2000.0 MHz	45	58	--	dB
Input / Output Impedance (Nominal)		50			$\Omega$

**ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!**

**© NEDI 2008. All Rights Reserved.**

1. The frequency  $f_C$  is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 $\Omega$  test system with VSWR $\leq$ 2.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_C$ . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery please contact our sales offices or e-mail [winnsky@winnsky.com](mailto:winnsky@winnsky.com)