


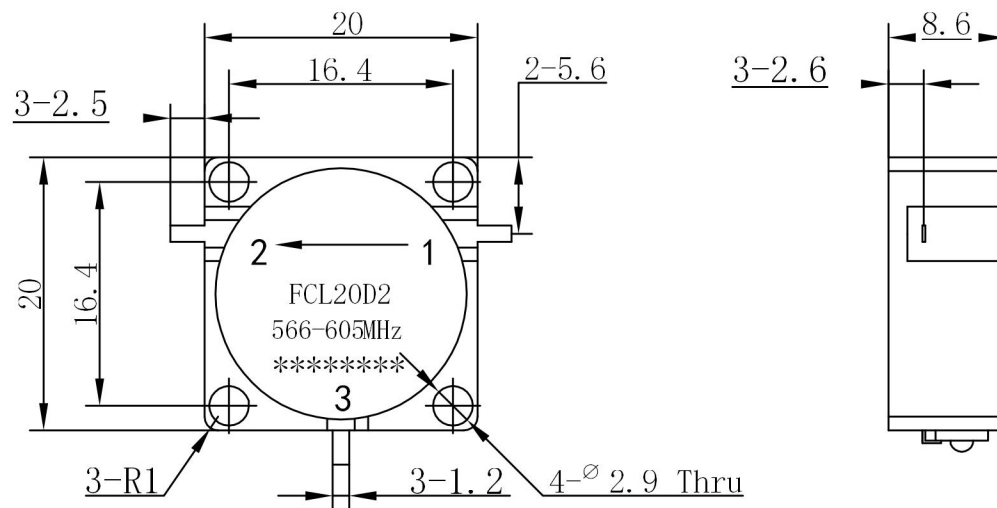

### Note:

- 1.Tolerances:  $\pm 0.20\text{mm}$
- 2.Material  
BODY: Steel  
TAB: BeCu
- 3.Surface Treatment  
BODY: Nickel plate  
TAB: Silver Plated

| Item                  | Unit   | Specification | Note                      |
|-----------------------|--------|---------------|---------------------------|
| Freq.Range            | MHz    | 566-605       |                           |
| Direction             |        | CCW/Left      |                           |
| Operating Temperature | °C     | -40~+85       |                           |
| Insertion Loss        | dB max | 0.35          | Room Temp (+25°C ± 10°C)  |
|                       | dB max | 0.35          | Over Temp (-40°C ~ +85°C) |
| Isolation             | dB min | 20            | Room Temp (+25°C ± 10)    |
|                       | dB min | 20            | Over Temp (-40°C ~ +85°C) |
| Return Loss           | dB min | 20            | Room Temp (+25°C ± 10)    |
|                       | dB min | 20            | Over Temp (-40°C ~ +85°C) |
| Avg Power             | W      | 100           |                           |
| Impedance             | Ω      | 50            |                           |

Customer suggestion and confirmation:


Signature:

Date:

Design: Colin

| Format | Scale | Version |
|--------|-------|---------|
| A4     | 1:1   | A       |

Date: 2016.7.11



Unit: mm