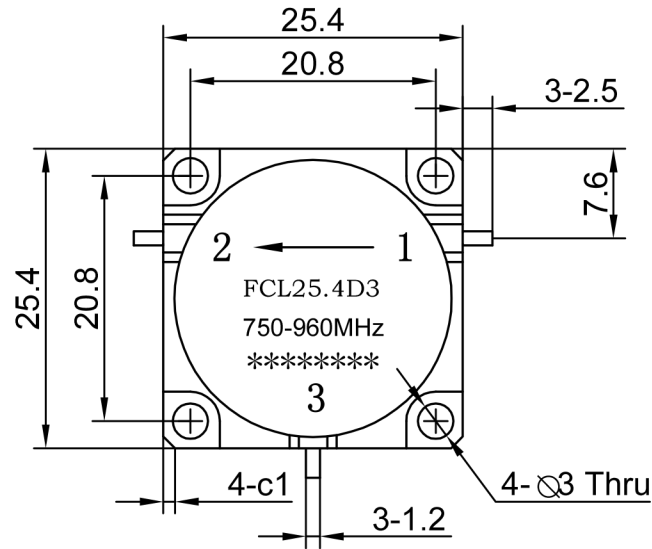


Note:

1.Tolerances: $\pm 0.20\text{mm}$

2.Material

BODY: Steel

TAB: BeCu

3.Surface Treatment

BODY: Nickel plate

TAB: Silver Plated

Item	Unit	Specification	Note
Freq.Range	MHz	750-960	
Direction		CW/Left	
Operating Temperature	°C	-40~+85	
Insertion Loss	dB max	0.40	Room Temp (+25°C ± 10°C)
	dB max	0.45	Over Temp (-10°C ~ +70°C)
Isolation	dB min	18	Room Temp (+25°C ± 10)
	dB min	16	Over Temp (-10°C ~ +70°C)
Return Loss	dB min	18	Room Temp (+25°C ± 10)
	dB min	16	Over Temp (-10°C ~ +70°C)
Avg Power	W	100	
Impedance	Ω	50	

Customer suggestion and confirmation:

Signature:

Date:

Design: Colin	Format	Scale	Version
	A4	1:1	A
Date: 2016.7.11	Page 1, Total 1		
			Unit: mm