




Drop-in Circulator

FCR35D10 2700-3000MHz

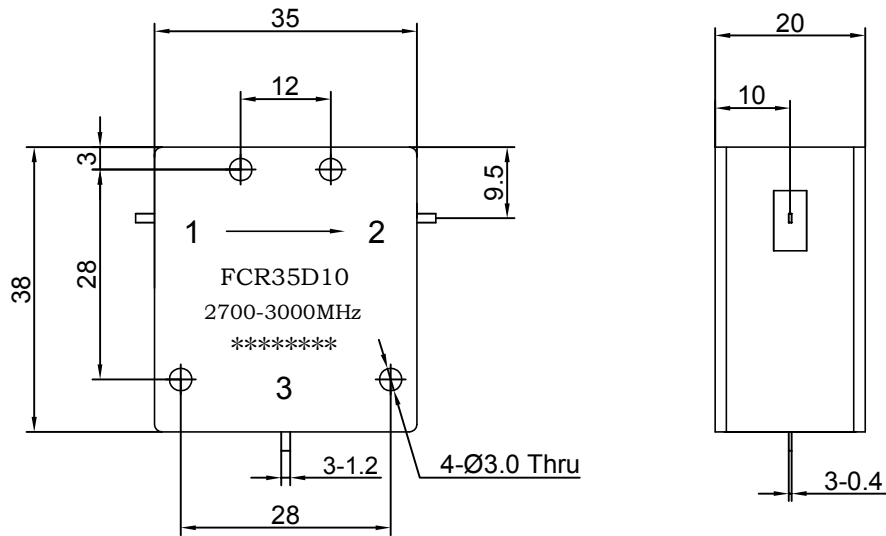

Note:

- 1.Tolerances: $\pm 0.20\text{mm}$
- 2.Material
BODY: Steel
TAB: BeCu
- 3.Surface Treatment
BODY: Nickel plate
TAB: Silver Plated

Item	Unit	Specification	Note
Freq.Range	MHz	2700-3000	
Direction		CW/Right	
Operating Temperature	°C	-40~+85	
Insertion Loss	dB max	0.50	Room Temp (+25°C ± 10°C)
	dB max	0.50	Over Temp (-40°C ~ +85°C)
Isolation	dB min	18	Room Temp (+25°C ± 10)
	dB min	18	Over Temp (-40°C ~ +85°C)
Return Loss	dB min	18	Room Temp (+25°C ± 10)
	dB min	18	Over Temp (-40°C ~ +85°C)
Peak Power	W	1200	
Impedance	Ω	50	

Customer suggestion and confirmation:

Signature:

Date:


Design: Colin

Format Scale Version

A4 1:1 A

Date: 2018.4.8

Page 1, Total 1



Unit: mm

www.winnsky.com