




Coaxial Circulator

FCR50CNKKK 220-230MHz

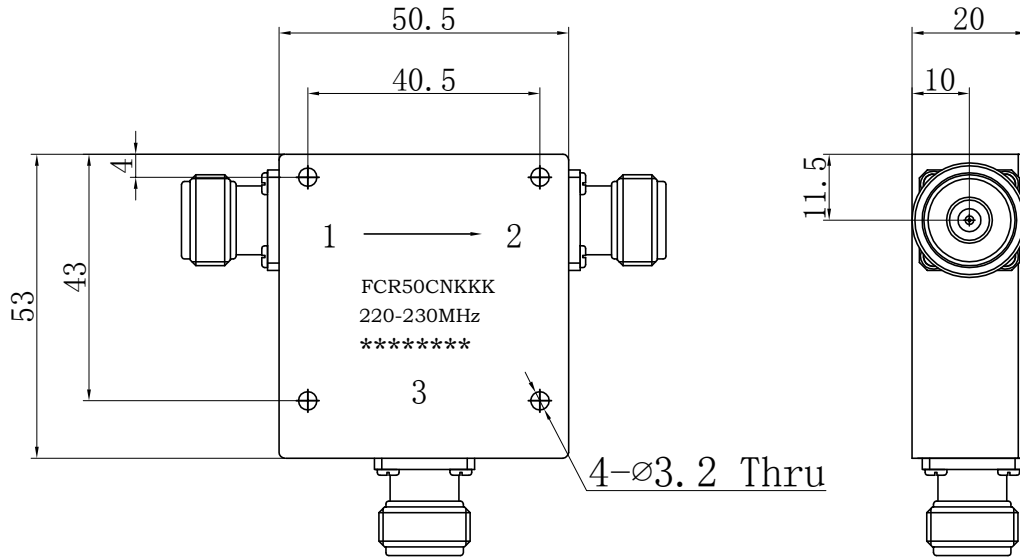

Note:  
 1.Tolerances:  $\pm 0.10\text{mm}$   
 2.Material  
 BODY: Steel TAB: BeCu

Item	Unit	Specification	Note
Freq.Range	MHz	220-230	
Direction		CW/Right	
Operating Temperature	°C	0~+70	
Insertion Loss	dB max	0.65	Room Temp (+25°C ± 10°C)
	dB max	0.70	Over Temp (0°C ~ +70°C)
Isolation	dB min	23	Room Temp (+25°C ± 10)
	dB min	20	Over Temp (0°C ~ +70°C)
Return Loss	dB min	23	Room Temp (+25°C ± 10)
	dB min	20	Over Temp (0°C ~ +70°C)
Avg Power	W	300	
Impedance	Ω	50	

Customer suggestion and confirmation:

Signature:

Date:

Design: Colin

Format Scale Version

A4 1:1 A

Date: 2020.3.3

Page 1, Total 1



Unit: mm

www.winnsky.com