




Coaxial Circulator

FCR25.4CNKKK 2300-2700MHz

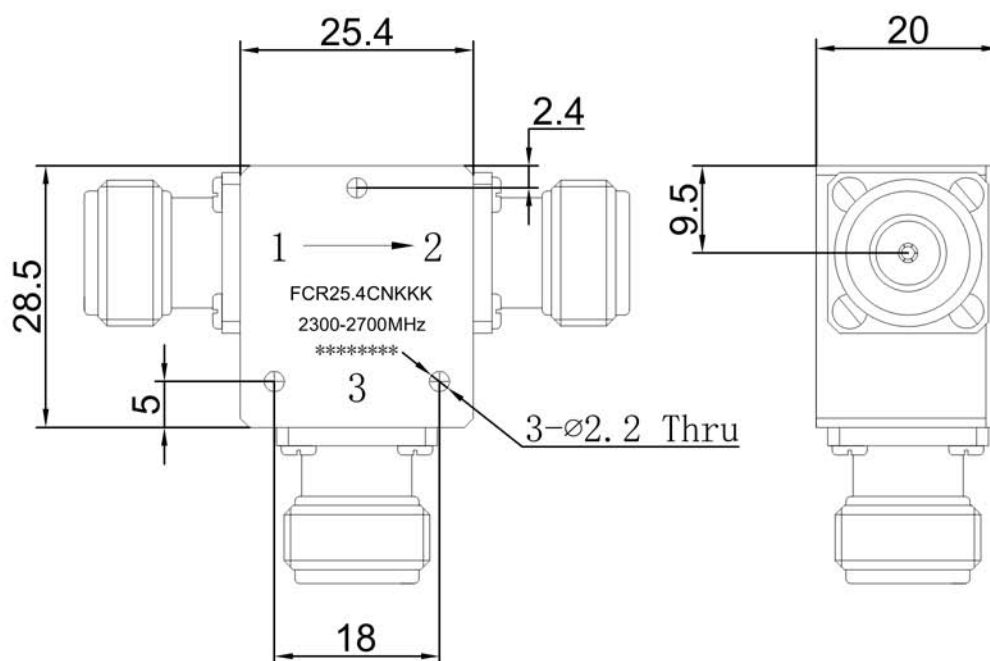

Note:
1.Tolerances: $\pm 0.10\text{mm}$
2.Material
BODY: Steel TAB: BeCu

Item	Unit	Specification	Note
Freq.Range	MHz	2300-2700	
Direction		CW/Right	
Operating Temperature	°C	-40~+85	
Insertion Loss	dB max	0.30	Room Temp (+25°C $\pm$ 10°C)
	dB max	0.30	Over Temp (-40°C ~+85°C)
Isolation	dB min	20	Room Temp (+25°C $\pm$ 10)
	dB min	20	Over Temp (-40°C ~+85°C)
Return Loss	dB min	20	Room Temp (+25°C $\pm$ 10)
	dB min	20	Over Temp (-40°C ~+85°C)
Avg Power	W	100	
Impedance	Ω	50	

Customer suggestion and confirmation:

Signature:

Date:

Design: Colin

Format Scale Version

A4 1:1 A

Date: 2016.7.11

Page 1, Total 1



Unit: mm

www.winnsky.com