


Features

- Low-loss RF filter for mobile systems
- Low amplitude ripple
- No matching network required for operation at 50Ω
- Ceramic package for **Surface Mounted Technology (SMT)**
- Lead-free production and **RoHS** compliant

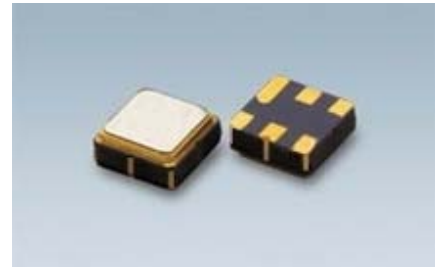

Package Dimensions

Ceramic Package: **DCC6C**



Pin Configuration

2	Input
5	Output
1, 3, 4, 6	Ground

Marking



Top View, Laser Marking

- "ND": Manufacturer's mark
- "F": SAW filter
- "9302": Part number
- " . ": Terminal 1
- "*": Lot number (The code shown below varies in a 4-year cycle)

Code	1	2	3	4	5	6	7	8	9	10	11	12
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	a	b	c	d	e	f	g	h	i	j	k	m
2012	n	p	q	r	s	t	u	v	w	x	y	z

Maximum Ratings

Rating		Value	Unit
Input Power Level	P	15dBm CW, $T_a=85^{\circ}\text{C}$, 通带高频点, 连续测试 1000hr 内, 电气性能满足规格要求;	dBm
DC Voltage	V_{DC}	6	V
Operating Temperature Range	T_A	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-40 ~ +85	$^{\circ}\text{C}$


Electrical Characteristics

Item	Minimum	Typical	Maximum	Unit
Center Frequency f_c		2595		MHz
Insertion Loss				
2545.00 2645.00 MHz	--	2.6	3.5	dB
Group Delay Ripple 2545.00 2645.00 MHz		10	30	ns
Absolute Attenuation α				
DC 2300.00 MHz	25	30		dB
2300.00 2515.00 MHz	4	12		dB
2690.00 2750.00 MHz	10	20		dB
2750.00 2770.00MHz	20	23		dB
2770.00 3000.00 MHz	23	25		dB
3000.00 6000.00 MHz	25	28		dB
Amplitude Ripple (p-p) 2545.00 2645.00 MHz $\Delta\alpha$		0.9	2	dB
Input VSWR 2545.00 2645.00 MHz		1.7: 1	2.5: 1	
Output VSWR 2545.00 2645.00 MHz		1.7: 1	2.5: 1	
Input / Output Impedance (Nominal)		50		Ω

RoHS Compliant


Electrostatic Sensitive Device

Typical Frequency Response

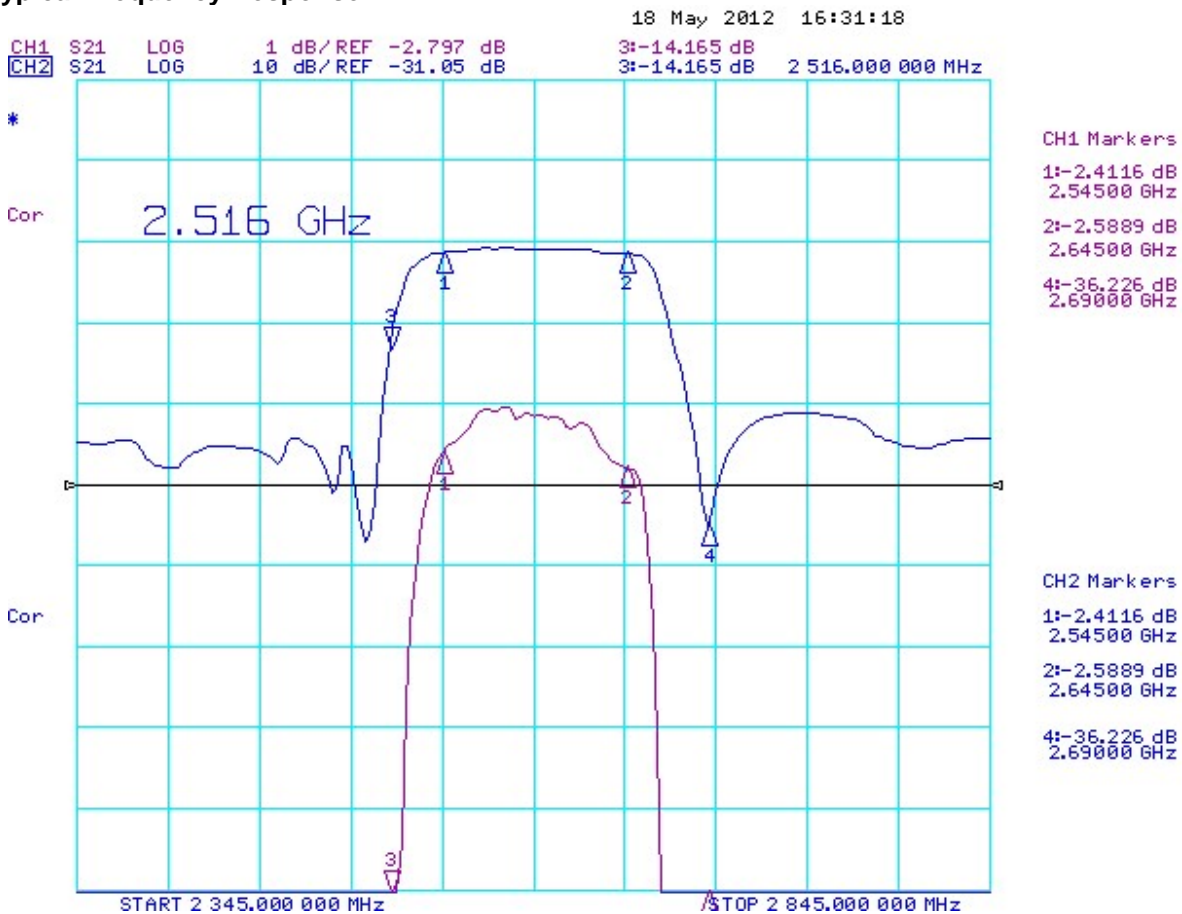

18 May 2012 16:31:42

CH1 S11 SWR 1 / REF 1 3: 2.6209
 CH2 S21 DEL 10 ns / REF -7.08 ns 3: 22.640 ns 2 516.000 000 MHz

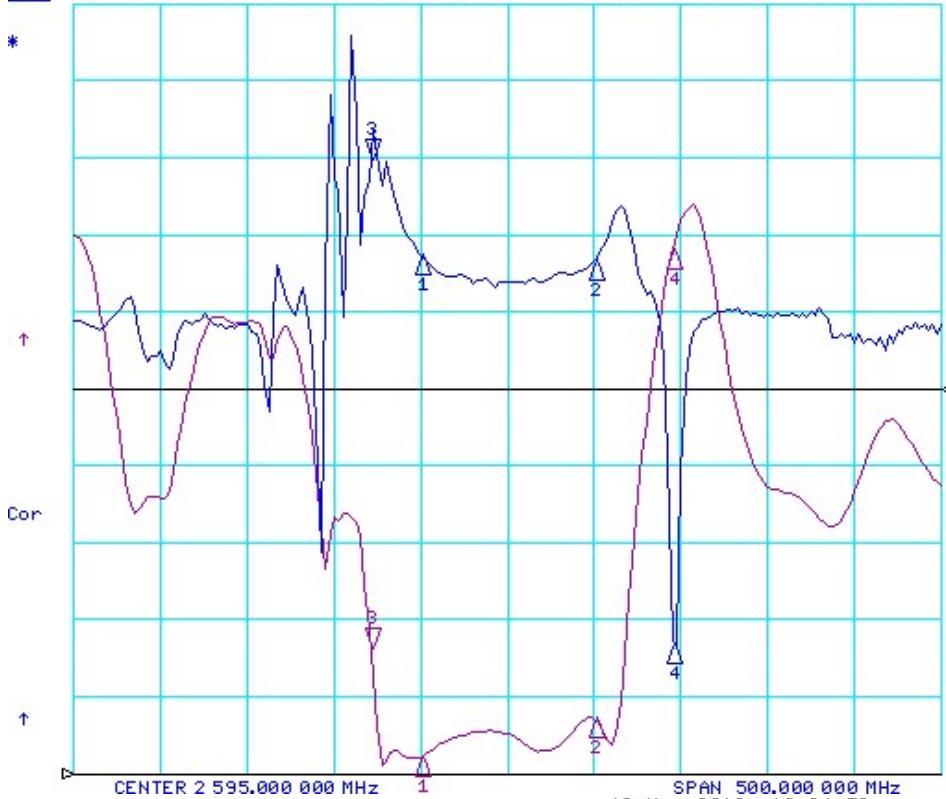

CH2 S21 LOG 10 dB / REF -31.05 dB 4: -27.497 dB 3 000.000 000 MHz



Stability Characteristics


	Test item	Condition of test
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours
3	Moisture resistance	(a) Condition: 40°C ± 2°C, 93 ⁺² ₋₃ % RH. (b) Duration: 96 hours (c) Wait 4 hours before measurement
4	Climatic sequence	(a) +70°C for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) +55°C for 24 hours, 90~95% R.H. (d) +40°C for 24 hours, 90~95% R.H.
5	High temperature exposure	(a) Temperature: 85°C (c) Wait 4 hours before measurement (b) Duration: 250 hours
6	Temperature cycling	(a) +85°C for 30 minutes ⇒ -40°C for 30 minutes repeated 120 times (b) Wait 4 hours before measurement

Requirements: The SAW filter shall remain within the electrical specifications after tests.


Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Test Circuit

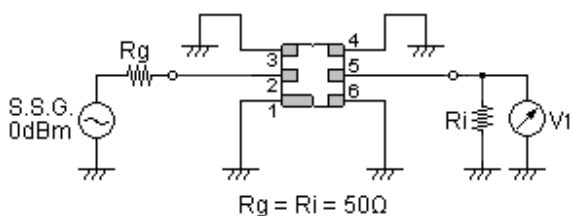


Recommended Land Pattern

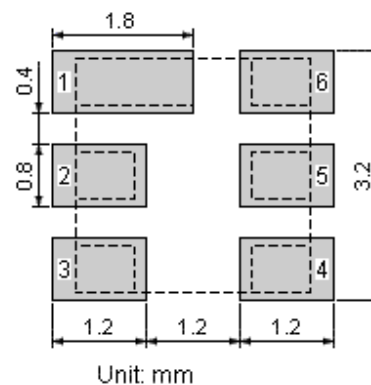


Packing Information

Carrier Tape

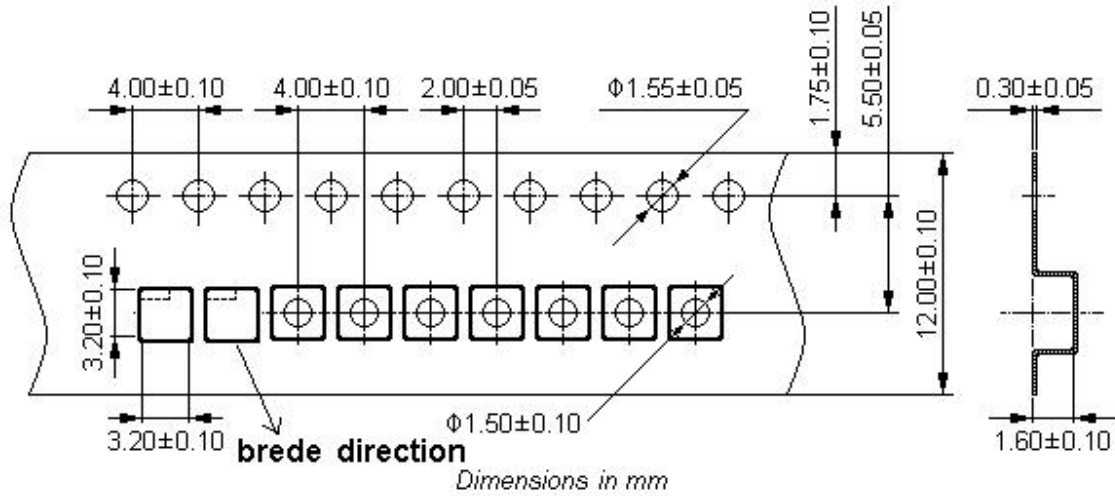

Reel Dimensions

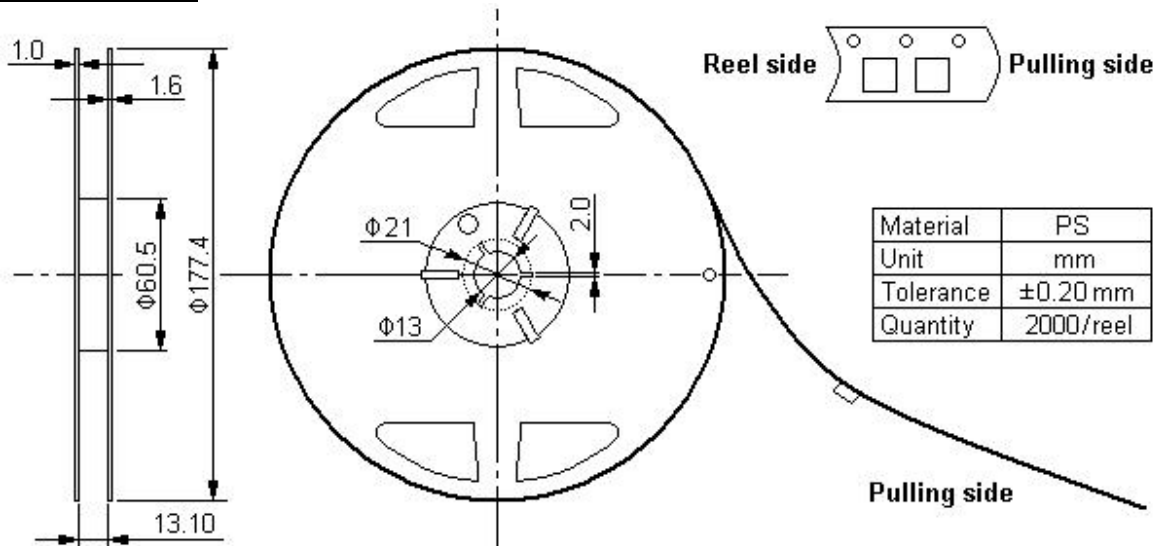


Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	10000	190×190×95	anti-static plastic bag & carton box 1 reel / bag	0.85
Carton Box II	20000	190×190×190	5 bags / box (10000 pcs) 10 bags / box (20000 pcs)	1.80

Unit: mm

Unit: kg

Recommended Soldering Profile

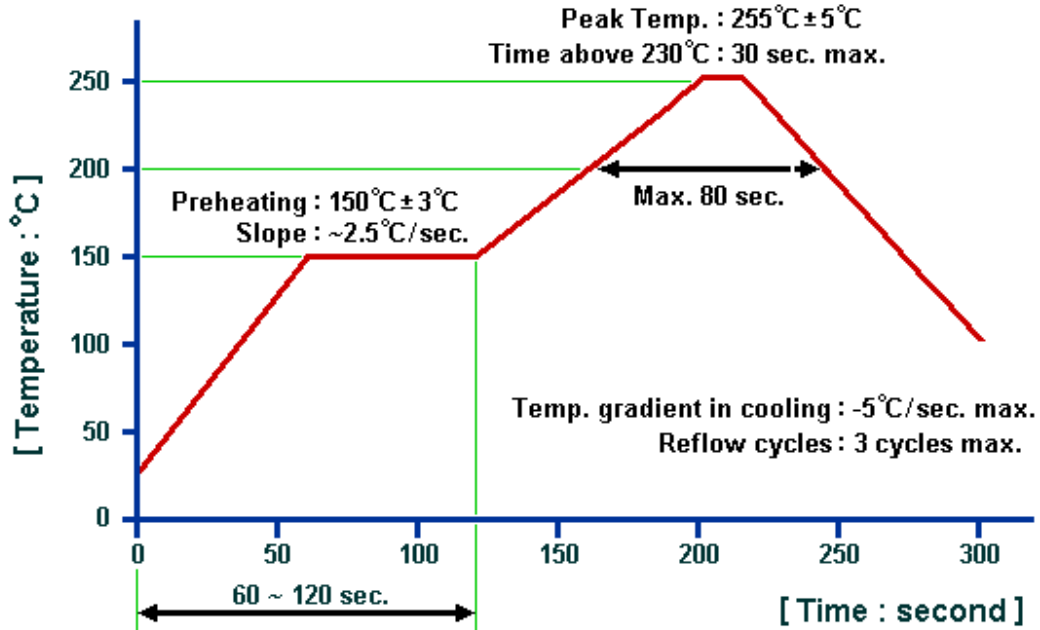

© NEDI 2012. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com